

**VALUE+ BATTEN 4320LM 36W 4000K 120 BEAM 120LM/W 1500MM 5FT
NON-DIMM INTEGRAL**

ILBTE064



THIS ITEM IS NOW UPGRADED OR DISCONTINUED. CONTACT US TO FIND A REPLACEMENT PRODUCT. This attractive and efficient LED battens offers a fantastic balance of price and performance. Running at 120lm/W, this batten will provide major energy and cost savings over legacy fluorescent technology. Schools, offices and many other workplaces will benefit from the good looks and efficient performance of the Value+ Batten.

Details

Quick Order Code:	'079644
Barcode:	5055788242635
Category:	Luminaires
Range Name:	Value+
Type:	Single
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Commercial & Industrial
Finish:	Matt White
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	1487
Product Depth (mm):	37
Product Width (mm):	54
Product Weight (g):	460
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Ceiling mounted
Mounting Type:	Rear & Side Cable Entry
Placement / Application:	Indoor

Electrical Data


	36
Power Consumption (W) :	0.9
Power Factor:	220-240
Voltage Range (v):	220-240
Input Voltage (V):	Non-Dimmable
Dimming:	Yes
Driver Included:	AC
Electric Current:	Yes
LVD Certified:	

Light Data

Luminous Flux in Lumens (lm):	4320
Luminous efficacy (lm/W):	120
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	35000
Switching Cycles:	100000
Useful Lumens (lm):	4320

Environment

LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP20

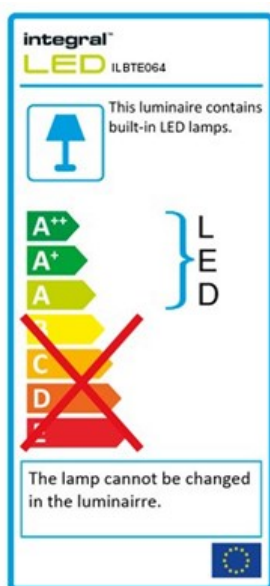

Packaging

Package Weight (g):	500	Portal.integral-led.com
Package Length (mm):	1530	

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Width (mm): 60
Package Depth (mm): 48