


A wide range of high quality British made battens, all supplied with lamps.

Attractively designed twin lamp batten luminaire specifically for T5 and T8 lamps.

Designed and manufactured to comply with EN 60598 and are CE certified.

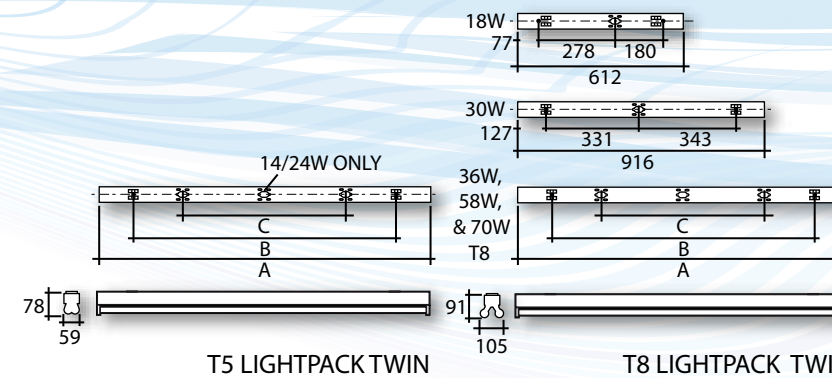

Lamp Options

- T5: 16mm Fluorescent Tubes
- T8: 26mm Fluorescent Tubes
- T12: 38mm Fluorescent Tubes

Product Specification

- Supplied with colour 840 lamps
- Manufactured from mild steel
- Resilient powder coated white finish
- Polycarbonate lampholders

Optional Lamp Type

(Add suffix to order code)

/X: Supplied excluding lamps

/840: Supplied with colour 840 lamps

/835: Supplied with colour 835 lamps

Optional Features

(Add suffix to order code)

/FTB: Fused terminal block

For Accessories please see pages 44-49

Order Codes

Including Lamps

T5 Tube - HF as standard

Order Code	Watt	A	B	C	Kg
LPT214/HF/840	2 x 14	574	330	-	1.6
LPT228/HF/840*	2 x 28	1174	930	600	3.0
LPT235/HF/840	2 x 35	1474	1230	600	3.0
LPT249/HF/840	2 x 49	1474	1230	600	3.0
LPT254/HF/840*	2 x 54	1174	930	600	3.0
LPT280/HF/840	2 x 80	1474	1230	600	3.0

T8 Tube - SS as standard

Order Code	Watt	A	B	C	Kg
LPT218/840*	2 x 18	612	-	-	1.6
LPT230/840	2 x 30	917	-	-	3.1
LPT236/840*	2 x 36	1221	966	600	2.0
LPT258/840	2 x 58	1521	1266	600	2.1
LPT270/840	2 x 70	1784	1530	600	2.4

T12 Tube - SS only

Order Code	Watt	A	B	C	Kg
LPT2100/840*	2 x 100	2394	2140	1200	6.5

* Not available with an emergency option.



Applications:

- Schools
- Offices
- Kitchens
- Workshops
- Corridors

Lightpack Twin Part Code Formula:

Product Family	Number of Lamps	Lamp Watts	Gear Option	Optional Feature	Lamp Type	Emergency Option
LPT	2	80	DD	FTB	835	-

ENERGY SAVINGS

We have a range of lighting controls that can offer motion and daylight sensing. This intelligence can either be integral to the fitting or located remotely. For more information and a free 'Return On Investment' report, your local Fitzgerald contact would be delighted to assist.

Installation

Exposed T	✗
Plasterboard	✗
Metal Pan	✗
Surface	✓
Suspended	✓

Gear options

- /HF:** High Frequency
- /AD:** 1-10V Analogue Dimming
- /SD:** Retractive Switch Dimming
- /DD:** DSI Digital Dimming
- /DL:** DALI Addressable Dimming

Emergency options

- /M3:** 3hr Maintained Emergency
- /RM3:** Remote Maintained Emergency