

**AUTO
RESET**



ATX20/60 *Prewired Mains and secondary leads*

**AUTO
RESET**




ATX60/AUTO *Supplied with pre-wired lampholder
Generous primary loop-in, loop-out facility removing the need for a junction box*

**AUTO
RESET**



ATX35/105 *Generous primary loop-in, loop-out facility removing the need for a junction box*

**AUTO
RESET**

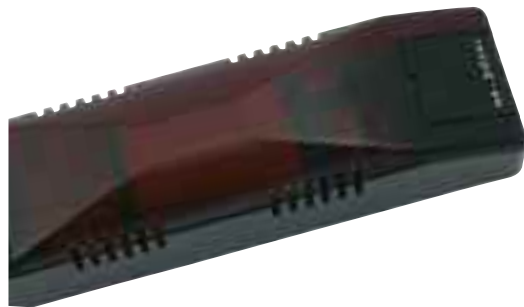

ATX200 *Generous primary loop-in, loop-out facility removing the need for a junction box*

ATX20/60/IP68



- Auto reset for thermal, short circuit and overload protection
- 5 year guarantee
- Fully dimmable with most leading and trailing edge branded dimmers

- IP68 model fully sealed and suitable for external use. Non-dimmable

IP20 **IP68**
ATX20/60/IP68
only

Code	Description	A	B	C
ATX20/60	20/60va	118	24	38
ATX60/AUTO	20/60va	114	30	45
ATX35/105	35/105va	175	30	44
ATX/200	20/210va	213	49	55
ATX20/60/IP68	20/60va	145	24	24

A = Length B = Height C = Width