

Product datasheet

Specifications



TeSys GV2 - Combination blocks - with contactor LC1K and LP1K

Local distributor code:
20569039

GV2AF01

EAN Code: 3389110213317

Main

Range	Lineryg
Product Name	FT
Device Short Name	GV2AF
Product Or Component Type	Combination block
Accessory / Separate Part Category	Connection accessory
Range Compatibility	TeSys K TeSys GV2 TeSys Deca

Complementary

Product Compatibility	LP1K LC1K
Poles Description	3P
Quantity Per Set	Set of 10
Net Weight	0.02 kg

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.700 cm
Package 1 Width	4.100 cm
Package 1 Length	5.500 cm
Package 1 Weight	12.000 g
Unit Type Of Package 2	BB1
Number Of Units In Package 2	10
Package 2 Height	8.000 cm
Package 2 Width	8.500 cm
Package 2 Length	12.000 cm
Package 2 Weight	148.000 g
Unit Type Of Package 3	S02
Number Of Units In Package 3	120
Package 3 Height	15.000 cm
Package 3 Width	30.000 cm

Package 3 Length	40.000 cm
------------------	-----------

Package 3 Weight	2.074 kg
------------------	----------

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

[Learn more >](#)



Transparency RoHS/REACH

Well-being performance

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information [Yes](#)

Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu Rohs Directive [Compliant](#)
[EU RoHS Declaration](#)

China Rohs Regulation [China RoHS declaration](#)

Environmental Disclosure [Product Environmental Profile](#)


Weee [The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins](#)

Circularity Profile [End of Life Information](#)

Dimensions Drawings


GV2AF01

Combination GV2ME + TeSys k contactor

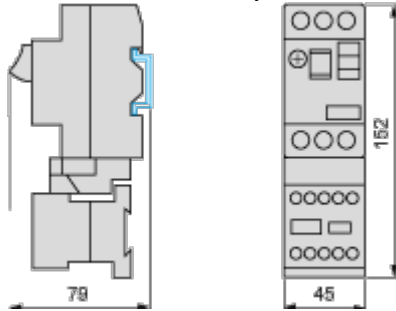

GV2AF3

Combination GV2ME + TeSys d contactor

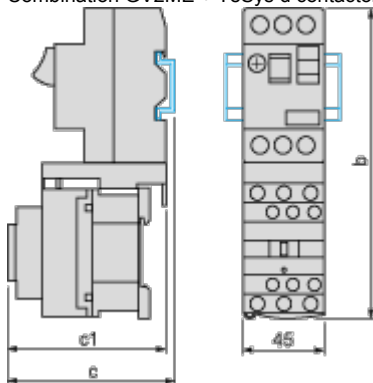

GV2ME +	LC1D09...D18	LC1D25 and D32
b	176.4	186.8
c1	94.1	100.4
c	99.6	105.9